

FGRM PTO-1390 (REV 5-93)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER 381INT/49740
<b>TRANSMITTAL LETTER TO THE UNITED STATES          DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING          A FILING UNDER 35 U.S.C. 371</b>			U.S. APPLICATION NO. (if known, see 37 CFR 1.5) <b>09/763971</b>

INTERNATIONAL APPLICATION NO. PCT/JP00/01393	INTERNATIONAL FILING DATE 8 March 2000	PRIORITY DATE CLAIMED
---	---	-----------------------

TITLE OF INVENTION

ELECTROMAGNETIC FUEL INJECTOR

APPLICANT(S) FOR DO/EO/US

Yasunaga HAMADA and Yasuo NAMAIZAWA

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:


1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) (executed).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Item 11. to 16. below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
  - a. 10 sheets of formal drawings showing Figs. 1a-1b, 2-4, 5a-5b, 6-7, 8a-8e, 9-10



**23911**  
 PATENT TRADEMARK OFFICE

U.S. APPLICATION NO. (if known, see 37 CFR 1.53) <b>097763971</b>		INTERNATIONAL APPLICATION NO. PCT/JP00/01393		ATTORNEY'S DOCKET NUMBER 381NT/49740			
17. [X] The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5)):  Search Report has been prepared by the EPO or JPO ..... \$860.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) ... \$690.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482)  but international search fee paid to USPTO (37 CFR 1.445(a)(2)) ..... \$710.00 Neither international preliminary examination fee (37 CFR 1.482) nor  international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$ 1000.00 International preliminary examination fee paid to USPTO (37 CFR 1.482)  and all claims satisfied provisions of PCT Article 33(2)-(4) ..... \$100.00  <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				CALCULATIONS		PTO USE ONLY	
				\$1000.00			
Surcharge of \$130.00 for furnishing the oath or declaration later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(e))				\$			
Claims		Number Filed		Number Extra		Rate	
Total Claims		15 - 20 =		0		X \$18.00	
Independent Claims		8 - 3 =		5		X \$80.00	
Multiple dependent claims(s) (if applicable)						+ \$270.00	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$1400.00			
Applicant claims Small Entity Status (See 37 CFR §1.27) [ ] yes [ ] no.				\$			
Reduction by 1/2 for filing by small entity, if applicable.							
<b>SUBTOTAL =</b>				\$1400.00			
Processing fee of \$130.00 for furnishing the English translation later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				+			
<b>TOTAL NATIONAL FEE =</b>				\$1400.00			
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28,3.31). \$40.00 per property +				\$ 40.00			
<b>TOTAL FEE ENCLOSED =</b>				\$1440.00			
				Amount to be:		\$	
				refunded			
				charged		\$	
<p>a. [ X ] Two checks in the amount of \$1400.00 for the filing fee and \$40.00 for the assignment recording fee are enclosed.</p> <p>b. [ ] Please charge my Deposit Account No. _____ in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. [ X ] The Commissioner is hereby authorized to charge any additional fees, which may be required, or credit any overpayment to Deposit Account No. <u>05-1323</u>. A duplicate copy of this sheet is enclosed.</p>							
<p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p>							
<p>SEND ALL CORRESPONDENCE TO: Evenson, McKeown, Edwards &amp; Lenahan, P.L.L.C. 1200 G Street, N.W., Suite 700 Washington, D.C. 20005 Tel. No. (202) 628-8800 Fax No. (202) 628-8844</p>				<p> SIGNATURE Jeffrey D. Sanok NAME 32,169 REGISTRATION NUMBER February 28, 2001 DATE</p>			
				JDS:pc			

10/PATS

## Electromagnetic Fuel Injector

## BACKGROUND OF THE INVENTION

## Field of the Invention

The present invention relates to an electromagnetic fuel injector for an internal combustion engine.

## Description of Related Art

In an electromagnetic fuel injection valve (sometimes called an injection valve), opening and closing operation is performed by controlling an electromagnetic coil in energizing with current and interrupting, and while the valve is opened, a fuel is injected to a intake air passage, a intake port or a combustion chamber.

As such an injector, a system is put to practical use, where in order to improve rising characteristics while a valve is opened, high voltage is produced by providing a drive circuit with a booster circuit, and while the high voltage is impressed to a coil of the injector, a current control circuit is used and a large current is forced to flow at a short time (for example, JP-A 6-241137). In the system, a battery voltage (for example, 12V) is raised (for example, 70V) during the valve opening. Particularly, as an applied injector, there is an injector in intracylinder injection system where a fuel pressure is high and a load in a return spring is large (an injector where a fuel is

injected directly into a combustion chamber of a gasoline engine).

In an injector using a booster circuit, when a valve is opened as already described, while a large voltage is impressed to an electromagnetic coil, a large current flows in the coil.

After the valve is opened, since a fuel pressure within the injector decreases and a return spring is not in the state of set load, force for holding the opened valve does not require magnetomotive force in comparison with the case of opening the valve. Accordingly while the opened valve is held, the voltage to the coil is changed from the booster circuit into the battery voltage, and in the coil a relatively small current enough to hold the opened valve is flowed by using a current control circuit.

Further in recent years, technology is proposed where a booster circuit is not used and rising characteristics during the valve opening are improved by a system impressing a battery (for example, JP-A 11-148439). In this system, two types of electromagnetic coils different in wire diameter and the number of turns of the coils are prepared. Among these, the first coil is mainly used during the rising operation while the valve is opened (the operation that the valve moves from the closed position to the fully opened position), and as characteristics, time variation rate of the magnetomotive

force is made large. Therefore in the first coil, the wire diameter is made relatively large (the coil resistance is made small), and the number of turns is made small and a large current flows in the coil with good response. Also since the current is made large, the magnetomotive force is raised.

The second coil is mainly used to hold the state after the valve is opened. Accordingly the response property as in the case of the first coil is not required, and the large magnetomotive force as in the case of opening the valve is not required. The time variation rate of the magnetomotive force may be small. Accordingly in the second coil, the wire diameter is made relatively small (the coil resistance is made large) and the number of turns is made large, and the magnetomotive force capable of holding the opened valve even at a small current is obtained.

In the battery voltage drive system, a booster circuit and a current control circuit as above described are not required. Accordingly the system is advantageous in that the cost reduction can be intended.

As above described, in the electromagnetic fuel injector valve, in order to raise the output characteristics and the response property, proposals are made and that the coil impressed voltage is raised and the coil current is made large, or two types of the

electromagnetic coils different in the characteristics are used. With accompanying this, the countermeasure for heat generated in the coil is further required. Particularly an intense heat of the coil under the violent state of the high temperature circumstances such as the inside of the engine room deteriorates the state of the insulation film and the bobbin of the coil and results in the reduction of the life. Accordingly the countermeasure for the intense heat generated in the coil is necessary.

Besides the countermeasure for the intense heat, when the first coil and the second coil different in the characteristics are prepared as above described, the number of the coil terminals increases. Therefore the problems remain in that how these terminals and other parts are made intensive and rationalized and the injector is realized at compact structure and low cost.

#### SUMMARY OF THE INVENTION

An object of the present invention is to provide an injector in which these problems are solved and the heat radiation property of the coil of the injector accompanied by the performance improvement is raised, and which can entirely withstand the environment of the intense heat and assures its long life and moreover can intend to achieve the compact structure and the cost reduction.

In order to attain the foregoing object, the present

invention is basically constituted as follows.

One is an injector with an electromagnetic coil for driving a valve, considering the heat radiation performance of the coil, where a bobbin for winding the coil thereon is constituted by a synthetic resin containing a filler having good heat conductivity.

Another is an injector where an electromagnetic coil for driving a valve is provided with two types of coils different in the characteristics, and these coils are wound separately in the axial direction of one bobbin, and among these coils, the winding region of one coil (the first coil) is near a movable core with a valve element being the object of the magnetic suction and the winding region of the other coil (the second coil) is away from the movable coil, and where the bobbin has a step difference of the outer diameter so that the bobbin outer diameter in the region with the second coil to be wound thereon is smaller than the bobbin outer diameter in the region with the first coil to be wound thereon, and on the other hand, the bobbin inner diameter in the region with the first coil to be wound thereon is partially enlarged and the step difference of the inner diameter is formed so that the annular space to interpose the seal ring is secured.

Another is an injector having a first coil and a second coil different in characteristics as above described in order to intend simplification and rationalization of

parts, where a connector part comprising three terminals is provided, and the above-mentioned first and second coils are connected to the power source and two switching elements for energizing control through the three terminals.

In order that electromagnetic coil relevant parts are made intensive and compact, another injector is constituted as follows.

That is, in an electromagnetic fuel injector where a first coil and a second coil as above described are arranged in the axial direction of one bobbin, and a connector part to connect terminals of these coils to an external power source and a switching elements is provided to project laterally at the upper side of the bobbin as above described,

characterized in that plural terminals of said first and second coils are arranged on the upper end surface of said bobbin, and at least one of these terminals has the base part positioned at the opposite side of the connector part with respect to the axial line of the main body of the injector, and this terminal has a curved part formed at the midway led from the base part to the connector part so as to avoid the axial line.

#### BRIEF DESCRIPTION OF DRAWINGS

Fig. 1(a) is a longitudinal sectional view of an injector according to an embodiment of the invention, and



(b) is a front view of a connector part of the injector;

Fig. 2 is a perspective view of the injector;

Fig. 3 is an exploded perspective view of the injector;

Fig. 4 is a front view showing an electromagnetic coil module to be used in the injector;

Fig. 5 is a drive circuit constitution diagram of an electromagnetic coil in the embodiment;

Fig. 6 is an explanation diagram showing a state that a valve opening signal is sent from an engine control unit to an injector;

Fig. 7 is a time chart showing coil energizing control of an injector in the embodiment;

Fig. 8 is a six-face view showing an example of a coil terminal to be used in the embodiment;

Fig. 9 is a diagram showing a coil connection mode in another embodiment of the invention; and

Fig. 10 is a fragmentary exploded perspective view of a coil module in another embodiment of the invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

An embodiment of the present invention will be described based on the drawings.

At first, the structure of an injector 10 in the embodiment will be described using Fig. 1.

The injector 10 is constituted by a stationary core

11, electromagnetic coils 12, 13, a yoke 14, a movable unit (also referred to as a movable core, a plunger or the like) 19 having a valve element 21, a nozzle 22, a return spring 26, an external resin mold 34 with a connector 34a and the like.

The movable unit 19 in this embodiment comprises a cylindrical movable core 19' having magnetism and a valve rod 20 coupled integrally.

In the inside of the cylindrical yoke 14 being a body of the injector, the stationary core (center core) 11, and the first coil 12 and the second coil 13 wound on a bobbin 15 are arranged from the center position toward the outside. The structure of the bobbin 15 and details of the coils 12, 13 will be described later.

The stationary core 11 is formed in a slender hollow cylinder, and the hollow part is a fuel passage 33. A part of the core 11 is positioned at the center within the yoke 14, and the other part is projected upward from the yoke 14. At the outer circumferential part of the core 11, a flange 11a is molded integral with the core 11. In the flange 11a, terminal holes 40 are arranged so that a plurality of coil terminals 35 - 37 provided on the bobbin 15 are inserted therethrough. The flange 11a is fitted to the upper opening of the yoke 14, and presses the inner circumferential edge of the yoke 14 locally and produces a metal flow (plastic flow). Thus the flange 11a is tightly

coupled with the yoke 14. Numeral 14a in Fig. 1 designates trace of the metal flow.

The movable unit 19 is coupled integral with the spherical valve element 21, and is arranged in line with the core 11 in the axial direction. The return spring 26 is located between a spring adjuster 41 fixed within the hollow cylinder of the core 11 and a spring shoe within the movable unit 19, and applies a spring load in the valve opening direction to the movable unit 19. By the spring load, when the electromagnetic coils 12, 13 are not energized with a current, the valve element 21 is pushed to a seat 22a provided at the nozzle 22 and closes an injection port 25.

When the electromagnetic coil is energized with current, a magnetic path is formed by the yoke 14, the stationary core 11 and the movable core 19', and the movable unit 19 is subjected to the magnetic suction toward the side of the core 11 and the valve element 21 is separated from the seat 22a and becomes the valve opened state. The stroke in the valve opening direction is restricted in that a part of the movable unit 19 (for example, the valve rod 20) abuts on a stopper 27.

During the valve opening, a pressurized fuel passes through a filter 32, a passage 33 and a passage 33' provided at the side of the movable unit and passes from the inside of the nozzle 22 through a groove 24a formed

along from the side to the bottom in a swirler (a fuel swirling element) 24, and then it is swirled and injected from the groove between the valve element 21 and the seat 22a. The output side of the groove 24a is opened to the inner circumferential surface of the swirler 24 so as to be shifted to the tangential direction with respect to the swirler center axis. Thus the fuel swirls and flows out from the groove 24a to the swirler center hole.

As an example of the injector according to the embodiment, that of direct injection system is exemplified where the injection port 25 faces the inside of the cylinder (combustion chamber) of the internal combustion engine and the high pressure fuel is injected directly into the cylinder. The electromagnetic coil is constituted by a first coil (referred to as "valve opening coil" here) 12 to be used mainly during the valve opening so as to raise the valve element 21 from the seat position to the predetermined opening stroke position (the opening stroke is restricted by the stopper 27, and the opening stroke operation is referred to as "valve opening operation"), and a second coil (referred to as "holding coil" here) 13 to be used to hold the subsequent valve opening state.

In the direct injection system, since the injector is opened and closed in the combustion chamber, during the valve closing, the valve must be made not opened by the pressure during the explosion process. Also during the

valve closing, the fuel must be injected into the high-pressure atmosphere in the compression process. Accordingly, in comparison with the system that the fuel is injected to the suction passage, the large return spring set load and the high fuel pressure are required. During the valve opening operation, the rising characteristics are required in that the magnetic suction force (magnetomotive force) to exceed the fuel pressure and the set load is generated with good response.

In order to obtain such rising characteristics during the valve opening, there are two systems as follows. One is a system that a large voltage (for example, about 70V) is impressed to an electromagnetic coil using a booster circuit, and a large current (for example, about 8A) is let flow in the coil using a current control circuit in a short time. Another is a system that a booster circuit and a current control circuit are not used, but the number of turns is made relatively little and wire diameter of a coil is made large (coil resistance is made small) and a battery voltage is impressed to the coil directly. Therefore a large current is let flow in the coil in a short time.

In this embodiment, the latter system (so-called battery voltage impressing system) is adopted. The coil with the coil wire diameter being large and the number of turns being relatively little corresponds to the valve

opening unit 12. The time variation rate of the magnetomotive force is large. The specific mode of the coil wire diameter, the number of turns or the like will be described later.

When the opened valve is to be held, since the fuel is already injected, the fuel pressure is decreased and the air gap between the movable unit 19 and the core 11 becomes small. Accordingly in the operation of holding the opened valve, the movable unit 19 can be held to the open state in smaller magnetomotive force than that during the valve opening operation.

In the opening valve holding state, in the system of the embodiment (battery voltage impressing system), the holding coil 13 having the coil wire diameter less than that of the valve opening coil 12 (coil 13 is large resistance) and the number of turns being relatively much is impressed by the battery voltage (in this case, the holding coil 12 and the valve opening coil 13 may be connected in series and both coils may be energized with current, and in the embodiment, such manner is done as described later). Thus the current flowing in the electromagnetic coil is decreased to the valve enough for the magnetomotive force to hold the opened valve (for example, about 3A). In addition, in the system using the booster circuit as above described, in the opened valve holding state, the coil impressed voltage is changed to the

battery voltage and the coil current is made small using the current control circuit.

Hereupon, the connection structure of the valve opening coil 12 and the holding coil 13 and relation to the coil drive circuit as above described by Figs. 5 and 6.

In the embodiment, basically, a connector part 34a comprising three terminals (a first terminal 36, a second terminal 35, a third terminal 37) is provided as shown in Fig. 1 and Figs. 3 to 5. By the three terminals, the valve opening coil (first coil) 12 and the holding coil (second coil) 13 are connected to a battery power source 53 and two switching elements 51a, 51b for energizing control as shown in Fig. 5.

The terminal 36 connects one end of the valve opening coil 12 to the plus side of the battery power source 53, and the terminal 35 connects the other end of the valve opening coil 12 to a switching element 51a for valve opening and also to one end of the holding coil 13, and the terminal 37 connects the other end of the holding coil 13 to the switching element 52a for the opened valve holding.

In the above-mentioned constitution, the terminal 35 is the terminal to connect the valve opening coil 12 to the switching element 51a, and also serves as an intermediate terminal to connect the valve opening coil 12 and the holding coil 13 in series connection state (when the

switching element 51a is turned off and the switching element 52b is turned on the coils 12 and 13 become series connection state). Accordingly terminals of two types of coils different in the characteristics need not be made four terminals in total, and the reduction of the number of parts can be intended.

In addition, in the embodiment, one end (minus side) of the holding coil 13 is connected through a diode 50 to the switching element 52a.

These coils 12, 13 are in the same direction in the wire winding direction, and both coils are added to each other in the magnetomotive force for a current flowing in the same direction. In the switching elements 51a, 52a, for example, a semiconductor switching element such as a power transistor may be used.

The drive circuits 51, 52 are constituted by transistor module provided with the switching elements 51a, 52a and the surge absorbing diodes 51b, 52b respectively.

The switching element 51a becomes a switching control element of the valve opening coil 12, and its collector is connected to the terminal 35, and its emitter is connected to the ground 54 of the battery power source 53. Its base inputs a control signal from the engine control unit (hereinafter referred to as "ECU") 55 (refer to Figs. 5 and 6).

The switching element 52a mainly becomes an



energizing control element of the holding coil 13, and its collector is connected through the diode 50 for reverse current inhibiting to the terminal 37, and its emitter is connected to the ground 54 of the battery power source 53. The diode 50 for reverse current inhibiting may be provided between the drive circuit 52 and the ground 54. Its base inputs a control signal from the ECU 55.

Here, a specific example of energizing control of the coils 12, 13 will be explained with reference to Fig. 5 and Fig. 7.

Fig. 7 is a time chart during the valve opening operation of the injector 100, and shows wave forms of an injection command signal, a switching element for a valve opening coil, a switching element for a holding coil, a valve opening coil current and a holding coil current.

If the injection command signal in response to a state of the engine is operated by the ECU 55, the switching element 52a is ON-controlled only in the same time  $T_i$  as the injection command signal. On the other hand, the switching element 51a is ON-controlled only in the short time  $T_c$  from the output start of the injection command signal. Accordingly, during the time  $T_c$ , any of the valve opening coil 12 and the holding coil 13 becomes an energizing state. However, the coil resistance is larger in the coil 13 than in the side of the coil 12. Therefore the almost current flows from the valve opening

coil 12 to the side of the switching element 51a.

In the valve opening coil 12, since the coil resistance and the inductance are small, a large current flows rapidly. Therefore the magnetomotive force necessary for the valve opening operation is generated with good response. That is, the valve opening coil 12 has characteristics that the time variation rate (rise) of the magnetomotive force is large. The energizing time for the current to flow in the coil 12 is limited to a short time until the valve opening operation, and moreover the number of turns is little. Thus the heating can be suppressed.

During the time  $T_c$ , the mutual induction phenomenon by the mutual inductance is produced between the valve opening coil 12 and the holding coil 13. Thus when the valve opening coil 12 rises largely, the electromotive force in the reverse direction is generated in the holding coil 13.

When such electromotive force is generated, if there is no diode 50, it follows that the reverse current as shown by broken line in Fig. 7 flows from the side of the ground 54 through the surge absorbing diode 52b in the holding coil 13. The reverse current produces a magnetic flux in the holding coil 13. However, the magnetic flux is produced in the direction that a magnetic flux generated in the valve opening coil 12 is decreased. If the reverse current is allowed, the produced magnetomotive force

substantially during the valve opening will be decreased. In order to avoid this, as shown in Fig. 5, the diode 50 for reverse current preventing is provided between the terminal 37 and the ground 54.

After the time  $T_c$  (after the valve opening), the switching element 51a is turned off and the switching element 52a continues the ON-state. Thus the valve opening coil 12 and the holding coil 13 are connected in series. Therefore the same current flows in the coils 12, 13. The current value becomes the value that the battery voltage is divided by the sum of the resistance values in the coils 12, 13. The number of turns and the resistance of the holding coil 13 are further larger than that of the valve opening coil 12. Thus the coil current is determined substantially by the resistance of the holding coil 13. In the time from  $T_c$  to  $T_i$ , current flows in the holding coil 13 having the number of turns relatively much and the magnetomotive force becomes large, and current flows also in the valve opening coil 12 having the number of turns relatively little. In such constitution, in comparison with the case that a current flows in the holding coil 13 only, the large magnetomotive force can be obtained in total. In addition, such coil constitution and energizing control can be realized in the direct injection system without using the booster circuit and the current control circuit. Thus such constitution is advantageous in the cost, and also has the

high speed response property. Therefore the present applicants already propose such constitution as the prior patent application (JP-A 11-100972).

In order to provide the above-mentioned characteristics, in the embodiment, the wire diameter of the valve opening coil 12 is made relatively large, for example, about  $\phi 0.45 - \phi 0.65$  mm, and the number of turns is made 40 turns, and the inner resistance is made about  $0.13 \Omega$ . Also the wire diameter of the holding coil 13 is made, for example, about  $\phi 0.15$  mm, and the number of turns is made 135 turns, and the inner resistance is made about  $5.5 \Omega$ .

The coils 12, 13 are arranged separately in the axial direction on one bobbin 15 as shown in Fig. 1, and the valve opening coil 12 is near the movable unit 19 in comparison with the holding coil 13. In such constitution, during the valve opening operation, magnetic flux produced in the coil 12 can pass through the movable core 19' and the stationary core 11 with a little loss, and the rising characteristics of the valve opening operation become better.

When the current flowing in the electromagnetic coil becomes large as above described, amount of heat generated increases. Therefore the heat radiation measure becomes necessary. Accordingly, the bobbin 15 is constituted by a synthetic resin containing a filler having good heat

conductivity.

In the embodiment, as a synthetic resin material of the bobbin 15, PPS excellent in the heat resisting property is adopted, and iron oxide as a filler having good heat conductivity is contained in the PPS. For example, the PPS is in 60 and several weight % - 10 and several weight %, and the iron oxide is in 30 - 80 weight %, and a glass fiber is in several weight % - 10 and several weight %. Regarding the PPS, any of bridging type or straight chain type may be used. In the case of straight chain type, it is excellent in impact resisting property and welding strength. The PPS has the heat conductivity being 0.4W/mk, and PA (polyacetal) resin in 6-nylon series widely used in such a bobbin in the prior art has the heat conductivity being about 0.2 - 0.3 W/mk. Accordingly the PPS resin has the good heat conductivity of the resin material itself in comparison with the bobbin resin in the prior art. When the iron oxide in 30 weight % is contained in the PPS resin, the heat conductivity becomes 1 W/mk. Also when the iron oxide in 80 weight % is contained in the PPS resin, the heat conductivity becomes 3 W/mk. However, if the filler is contained in 80 weight % or more, a difficulty is produced in the molding. Thus the upper limit of the filler content is preferably less than this value.

The present inventors have made an article on an experimental basis and performed the estimation test of the

article in the case that normal working in twenty years was supposed and the upper limit value of the heat resisting temperature of the coil film was made 242°C.

An example of the test results is shown Table 1 below.

Table 1

No.	Specification								Temperature rise (°C) (Duty 40%)	
	Holding coil			Valve opening coil			Bobbin material	Between core and bobbin	No fuel	With fuel
	Wire diameter	Turns	Resistance	Wire diameter	Turns	Resistance				
1	φ 0.15	90	4.0 Ω	φ 0.65	40	0.13 Ω	PPS 0.4 w/mk	Contact	238.5	...
2	φ 0.15	90	3.7 Ω	φ 0.65	40	0.13 Ω	PPS+ good heat conducting filler 3w/mk	Pad	100.7	85.9
3	φ 0.15	90	3.7 Ω	φ 0.65	40	0.13 Ω	ditto 1w/mk	Conduc- tive adhe- sive	132.5	124.6
4	φ 0.15	180	7.7 Ω	φ 0.65	40	0.13 Ω	ditto 3w/mk	Contact	44.9	39.1
5	φ 0.15	180	7.7 Ω	φ 0.65	40	0.13 Ω	ditto 1w/mk	Conduc- tive adhe- sive	80.4	68.2
6	φ 0.15	180	7.7 Ω	φ 0.65	40	0.13 Ω	ditto 1w/mk	Contact	106.0	97.2
7	φ 0.15	135	5.5 Ω	φ 0.65	40	0.13 Ω	ditto 1w/mk	Contact	127.2	127.2
8	φ 0.15	90	3.7 Ω	φ 0.65	30	0.09 Ω	ditto 3w/mk	Contact	128.9	128.9

In the experiment, the duty of the injection driving was made 40 percent, and the injector was driven under the environment temperature being the normal temperature (20°C),

and the coil temperature was measured. In the table, the area between the core and the bobbin means mode between the outer circumference of the stationary core 11 and the inner circumference of the bobbin 15, and the "contact" means the case that both the core 11 and the bobbin 15 are contacted in the close contact state, and the "conductive adhesive" means that both as above described are adhered with the adhesive having the heat conductivity, and the "pad" means that the heat conductive material is filled between both as above described.

Also item "temperature rise" in the table is divided into "no fuel" and "with fuel". The "no fuel" means that assuming the gasification of the fuel within stationary core 11, the injector is driven in the state of no fuel and the temperature rise of the coil is measured. The state that the fuel within core 11 is gasified, means the case that when the inside of the engine room is at the high temperature environment of, for example, about 130°C (when the temperature is high as in the midsummer, the high load working performed continuously, and then immediately after the engine is stopped, such high temperature state is produced) and also the injector is at the stop state, such gasified state is produced.

The "with fuel" means the case that the fuel is in the liquefied state within the stationary core 11. The injector according to No. 1 means an injector according to

the comparative example where a glass fiber is contained in the PPS resin as a bobbin. In the injector according to No. 2 or later, the filler of good heat conductivity (iron oxide, here) is contained in the PPS resin as a bobbin (however, a glass fiber filler is contained in several weight % - ten and several weight %). Among them, the heat conductivity being 3 W/mk is the case that the containing ratio of the filler of good heat conductivity is 80 weight %, and the heat conductivity being 1 W/mk is the case that the containing ratio of the filler of good heat conductivity is about 30 weight %.

As a result of the endurance test, in the case of No. 1, in the environment of the normal temperature (20°C) and "no fuel", the coil temperature rises to 238.5°C. In the case that the inside of the engine room is at the high temperature environment (130°C), it is supposed that the coil temperature is further rises by 110°C (130°C - 20°C). Accordingly when the inside of the engine room is at the violent high temperature environment, the coil temperature becomes (238.5°C + 110°C), and this entirely exceeds the heat resisting temperature 242°C of the coil film.

On the contrary, in the case of the injector at No. 2 or later, the heat radiation characteristics of the coil temperature is improved by the bobbin. Therefore the coil temperature remains about 132.5°C at most, even in the case of "no fuel" at the environment of the normal temperature.



Accordingly even if the inside of the engine room is at the violent high temperature environment, the coil temperature is about  $(132.5^{\circ}\text{C} + 110^{\circ}\text{C})$ . Except for the case of No. 3, the result is obtained that the coil temperature is less than the coil film resisting temperature  $242^{\circ}\text{C}$ . The heating of the coil in this case is radiated from the bobbin 15 through the core 11 and the yoke 14.

Among them, considering the molding property of the bobbin, the coil resistance and the aspect of the cost, that of No. 7 is at good balance synthetically. Therefore according to the embodiment, even if the coil heating temperature rises by the coil exciting current being large accompanied by the improvement of the performance of the injector, the excellent heat radiation performance can be exhibited and the long life of the injector can be secured.

In addition, in place of the direct injection system (DI system), in the injection in the system that a fuel is injected at the suction passage, the coil current does not become larger as in the DI system. Therefore in the case, even at the injection specification of No. 1 (the heat conductivity of the bobbin being  $0.4 \text{ W/mk}$ ) in the above-mentioned table, the heat radiation performance can be raised in comparison with the injector of similar type until now.

Further in the embodiment, in addition to the heat radiating property of the coil, the bobbin structure is

adopted where parts can be arranged at intensive method rationally.

Regarding the bobbin 15, as shown in Fig. 1, the step difference of the outer diameter is provided so that the bobbin outer diameter in the region with the holding coil 13 wound thereon is smaller than the bobbin outer diameter in the region with the valve opening coil 12 wound thereon. On the other hand, the bobbin inner diameter in the region with the valve opening coil 12 wound thereon has the step difference of the inner diameter 153 where a part of the inner diameter becomes large, in order to secure the annular space S for the interposing of the seal ring 18 of the non-magnetic property.

In such constitution, the seal ring 18 can be installed between the outer circumference at the top end of the stationary core 11 and the inner bottom of the yoke 14 in the state that the bobbin inner space S is utilized effectively. Moreover the bobbin is thinned at the position with the seal ring 18 existing and at the position with the holding coil 13 existing and thereby the heat of the electromagnetic coils 12, 13 can be escaped to the side of the core 11 efficiently (a part of the heat can be escaped through the seal ring 18 to the core 11 and the yoke 14).

Particularly when the heat of the coils 12, 13 is conducted through the bobbin 15 having good heat

conductivity to the core 11 and the yoke 14 as in the embodiment, even if a gap between the most outside in the coil and the yoke 14 remains as it is, the sufficient heat radiation of the coil is assured. Also since the gap remains as it is, the cost reduction is intended, and moreover the gap can be utilized as the insulation gap layer between the coil and the yoke.

In addition, in the seal ring 18, one end side (upper part side) is coupled by the metal flow, and the lower end side is in edge shape and is cut into the yoke bottom part.

Thus it seals between the coil 11 and the yoke 14.

According to the bobbin structure, the injector is excellent in the heat radiating property of the coils 12, 13, and moreover the electromagnetic coil part and the seal part are made intensive and the injector is made compact.

Next, the arrangement structure of the coil terminal will be explained.

In the coil terminal of the embodiment, the three-terminal structure is adopted as already described. Any of the three terminals is arranged at the upper end surface of the bobbin 15. In coil terminals of the embodiment, three-terminal-structure is adopted as already described. Any of the three terminals is arranged on the upper end surface of the bobbin 15. Among them, the terminals 36, 37 are arranged on the axial line o of the main body of the

injector, in other words, on the position near the connector part 34a with respect to the core 11. The terminal 35 is arranged in that the base part 35a is on the opposite position to the connector part 34a. The terminal 35 is hidden in the shadow of the core 11 viewing from the side of the connector part 34a. Accordingly when the terminal 35 is to be led to the side of the connector part 34a straightforward, the core 11 obstructs its path. Therefore in the embodiment, regarding the terminal 35, a curved part 35' is formed from the base part 35a at the midway led to the connector part 34a, so as to avoid the axial line hence the core 11.

In the embodiment, considering the workability of the terminal 35, the terminal 35 is divided into a base part 35a and a lead frame 35b, and the lead frame 35b is welded to the base part 35a. In any of the terminals 35, 36, 37, one end becomes a connector terminal.

In such constitution, when a plurality of coil terminals are arranged on the bobbin end surface, the degree of freedom is raised, and moreover, three or more connector terminals (coil terminals) can be arranged on one connector in intensive method, and the injector is made compact.

The connector part 34a is molded integrally with the mold resin 34 constituting the upper external part of the injector. Viewing from the bobbin 15, the connector part

34a is projected to the lateral side of the mold resin at the upper side. In the terminals 35 - 37, a part except for the top end becoming the connector terminal is insert molded (embedded) in the mold resin 34.

Hereupon, the coil module to be used in the injector of the embodiment will be explained using Fig. 4 and Fig. 8.

Figs. 8(a) - (e) show a top view, a front view, a left side view, a right side view and a bottom view of the base part 35a in the coil terminal 35. The base part 35 is formed integrally by a center pin 350 and arm parts 351, 352 stretched laterally at the lower part of the center pin 350, and is molded by the press working of a metal sheet. In the arm part 351, a part 351a binding the winding finishing end 12' of the valve opening coil 12 is provided (refer to Fig. 4), and in an arm part 352, a part 352a binding the winding start end 13' of the holding coil 13 is provided. The coil end being bound is grasped by the binding parts 351a, 352a and bending pieces 351', 352', and is joined in fusing with the bending piece.

Series connection of the valve opening coil 12 and the holding coil 13 becomes possible through the binding parts 351a and 352a, and connection to the switching element 51a for the valve opening coil 12 as already described becomes possible.

In the base part 35a, a part is coated with an insulation resin mold as shown in an imaginary line (dash-

and-dot line) 360 in Fig. 8(b). Figs. 1, 3 and 4 show the state that a part of the resin mold 360 is projected from the upper end of the bobbin 15. The resin mold part 360 does not contain a filler of iron oxide. The reason for applying the resin mold 360 to the base part 360 is as follows. The bobbin 15 in the embodiment has the insulation property but contains iron oxide. Thus the bobbin 15 is not always complete in the point of the insulation property. Therefore among the base part 35a, at least a part embedded in the bobbin 15 is coated with an insulation resin not including iron oxide and insulation of the terminal is assured.

The other terminals 36, 37 have an arm part binding one end of the coil only at one side, although not shown. According to the reason as above described, in the terminals 36, 37, at least a part embedded in the bobbin is coated with an insulation resin mold 360.

As shown in Fig. 4, the bobbin 15 is wound by the valve opening coil 12 and the holding coil 13, and the terminals 35, 36, 37 are arranged on the upper end surface. Thus the coil module is constituted.

In the arm part of each terminal from the bobbin 15, respective coil ends are bound and joined in fusing.

In Figs. 1 and 3, numeral 23 designates a swirler pushing unit, numeral 30 designates a flange for mounting the injector, numeral 31 designates a collet, numeral 32

designates a filter, numeral 60 designates a corrugated packing, numeral 70 designates a removing part of the connector 34a, and numeral 71 designates a connector guide.

According to the embodiment, following effects are obtained.

(1) Heat resisting property of the bobbin 15 is improved, and moreover the heat radiating property for the coil heating is raised.

Accordingly even if the case of the electromagnetic coil having the coil characteristics where the environment temperature is violent and the heating temperature is high as in the direct injection, reliability of the coil and the bobbin is maintained and the long life of the injection can be assured.

(2) Even if two types of electromagnetic coils different in characteristics are used, three terminals of the coil module are used.

Accordingly parts are used rationally and in intensive method, and the coil module hence the injector is made compact and the cost reduction is intended.

(3) Also when the coil terminal 35 is drawn to the connector part 34a, the consideration is done in a part of the terminal so as to avoid the core 11. Accordingly the degree of freedom in the design of the terminal layout can be raised, and moreover three or more coil terminals are arranged on one connector in intensive method and the

injector can be made compact.

In the above-mentioned embodiment, although iron oxide is exemplified as a filler of good heat conductivity to be contained in the bobbin 15, the filler of good heat conductivity is not limited to this, but otherwise ceramics with good heat conduction (for example, alumina), BN (boron nitride) or the like may be used. Such good heat conductive material may be mixed in one type or two or more types.

Further connection of the valve opening coil 12 and the holding coil 13 may be considered in various modes.

For example, as shown in Fig. 9, in the first terminal 36, one end of the valve opening coil 12 and one end of the holding coil 13 may be connected to the plus side of the battery power source 53, and in the second terminal 35, other end of the valve opening coil 12 may be connected to the first switching element 51a, and in the third terminal 37, other end of the holding coil 13 may be connected to the second switching element 52a. In this case, the energizing control of the coil may be similar to Fig. 7. Also in the embodiment, the connector of three terminals can be realized in the injector having the valve opening coil 12 and the holding coil 13.

Further in the injector having the valve opening coil 12 and the holding coil 13, if independent terminals 35 to 37 and 80 are prepared in each coil end, four -



terminal structure as shown in Fig. 10 can be adopted. Also in this case, when the terminal base part is arranged at the opposite side of the connector part with respect to the axial line of the main body of the injector, curved parts 35', 80' are formed in a part of the terminal. Thus the degree of freedom of the terminal layout and intensive use of plural terminals in one connector can be intended.

In the embodiment, the terminal 80 comprises the base part 80a and the lead frame 80b.

#### Industrial Applicability

According to the present invention as above described, the heat radiation property of the coil of the injector accompanied by the performance improvement is raised, and the injector can withstand the high heat environment well, and the long life of the injector is assured, moreover the injector is made compact and the cost reduction can be intended.

## WHAT IS CLAIMED IS:

1. An electromagnetic fuel injector having an electromagnetic coil for valve driving, characterized in that a bobbin with said coil to be wound thereon is constituted by a synthetic resin containing a filler having good heat conductivity.

2. An electromagnetic fuel injector comprising a stationary core arranged at the center of the main body of the injector, an electromagnetic coil arranged at the outside of the stationary core through a bobbin, and a cylindrical yoke arranged further at the outside of the electromagnetic valve, characterized in that said bobbin is constituted by a synthetic resin containing a filler having good heat conductivity, and heat of said coil is conducted to said core and said yoke, and an air gap is formed between the most outside surface in said coil and the inner circumference of said yoke.

3. An electromagnetic fuel injector having an electromagnetic coil for valve driving, characterized in that a bobbin with said coil to be wound thereon is constituted by polyphenylene sulfide (hereinafter referred to as "PPS") containing iron oxide and/or alumina as a filler.

4. An electromagnetic fuel injector as set forth in claim 3, wherein said bobbin is constituted by iron oxide and/or alumina in 30 - 80 weight %, and further by PPS and

glass fiber.

5. An electromagnetic fuel injector having an electromagnetic coil for valve driving, characterized in that a bobbin with said coil to be wound thereon is constituted by a resin molding material of heat conductivity being 0.4 W/mk or more.

6. An electromagnetic fuel injector having an electromagnetic coil for valve driving, characterized in that a bobbin with said coil to be wound thereon is constituted by a resin molding material of heat conductivity being 1.0 - 3.0 W/mk.

7. An electromagnetic fuel injector as set forth in claim 1, wherein said electromagnetic fuel injector is in a system that a fuel is injected directly into a cylinder of an internal combustion engine.

8. An electromagnetic fuel injector as set forth in claims 1, wherein said electromagnetic fuel injector is in a system that a fuel is injected directly into a cylinder of an internal combustion engine, and the battery voltage is impressed directly to said electromagnetic coil during the valve opening, and said electromagnetic coil is provided with the first coil in which a large exciting current flows in a short time during the rising of the valve opening operation so as to secure magnetomotive force necessary to open the valve mainly, and with the second coil in which a relatively small exciting current flows so

as to secure magnetomotive force to hold the valve opening state mainly after the valve is opened.

9. An electromagnetic fuel injector wherein two types of electromagnetic coils different in characteristics are provided in an annular space formed between a stationary core arranged at the center part of the main body of the injector and a cylindrical yoke arranged in the outside of the stationary core, and the space between said stationary core and said yoke is sealed by a seal ring, and said coils are wound separately in the axial direction on one bobbin, and among them, one coil (hereinafter referred to as "first coil") has a winding region near a movable unit with a valve element being the object of magnetic suction, and the other coil (hereinafter referred to as "second coil") has a winding region remote from the movable unit, characterized in that said bobbin has step difference of the outer diameter so that the bobbin outer diameter in the region with the first coil wound thereon, and on the other hand, said bobbin has step difference of the inner diameter so that the bobbin inner diameter in the region with the first coil wound thereon is made large partially so as to secure the annular space for interposing said seal ring.

10. An electromagnetic fuel injector as set forth in claim 9, wherein said first and second coils are set so that said first coil has the large wire diameter and the number of turns being little and a large current flows in

comparison with the second coil, and magnetomotive force necessary to move the valve from the closing position to the opening position is generated by the first coil, and magnetomotive force to hold the valve opening state is generated by the second coil.

11. An electromagnetic fuel injector as set forth in claim 9, wherein said bobbin is molded by a synthetic resin containing a filler of good heat conductivity.

12. An electromagnetic fuel injector for an internal combustion engine characterized in that said electromagnetic fuel injector comprises a first coil in which a large current flows in a short time during the rising of the valve opening operation so as to secure magnetomotive force necessary to open the valve, a second coil in which a relatively small current flows so as to secure magnetomotive force to hold the opening state of the valve, and a connector having three terminals, and said first coil and said second coil are connected to the power source and two switching elements for energizing control by the three terminals.

13. An electromagnetic fuel injector as set forth in claim 12, wherein among the three terminals, the first terminal connects one end of the first coil to the power source, and the second terminal connects other end of the first coil to the first switching element and also to one end of the second coil, and the third terminal connects

end of the second coil, and the third terminal connects other end of the second coil to the second switching element.

14. An electromagnetic fuel injector as set forth in claim 12, wherein among the three terminals, the first terminal connects one end of the first coil and one end of the second coil to the power source, and the second terminal connects the other end of the first coil to the first switching element, and the third terminal connects the other end of the second coil to the second switching element.

15. An electromagnetic fuel injector wherein said electromagnetic fuel injector is provided with a first coil with time variation rate of magnetomotive force being large and a second coil with time variation rate of magnetomotive force being small, as electromagnetic coils for the valve driving, and the first coil and the second coil are arranged separately on one bobbin in the axial direction, and a connector part to connect the terminals of the coils to an external power source and a switching elements is projected to a lateral side on the upper side of the bobbin,

characterized in that a plurality of terminals of said first coil and said second coil are arranged on the upper end surface of a bobbin, and at least one of the terminals has the base part positioned at the opposite side


of said connector part with respect to an axial line of the main body of the injector, and the terminal has a curved part at the midway led from the base part to said connector part so as to avoid the axial line.

## ABSTRACT OF THE DISCLOSURE

In an electromagnetic fuel injector of an internal combustion engine, an electromagnetic coil for valve driving is to be wound on a bobbin, and the bobbin is constituted by a synthetic resin containing a filler having good heat conductivity. For example, the bobbin with the coil to be wound thereon is constituted by PPS containing iron oxide and/or alumina as a filler. Two types of electromagnetic coils different in characteristics are provided in the fuel injector. These coils are wound separately on one bobbin in an axial direction. Among them, one coil (hereinafter referred to as "first coil") has a winding region near a movable unit with a valve element being the object of magnetic suction, and other coil (hereinafter referred to as "second coil") has a winding region away from the movable unit.

The bobbin has a step difference of the outer diameter so that the bobbin outer diameter in the region with the second coil to be wound thereon is smaller than the bobbin outer diameter in the region with the first coil to be wound thereon, and the bobbin inner diameter has a step difference in that the bobbin inner diameter in the region with the first coil to be wound thereon is made large partially so as to secure an annular space to interpose a seal ring therein.



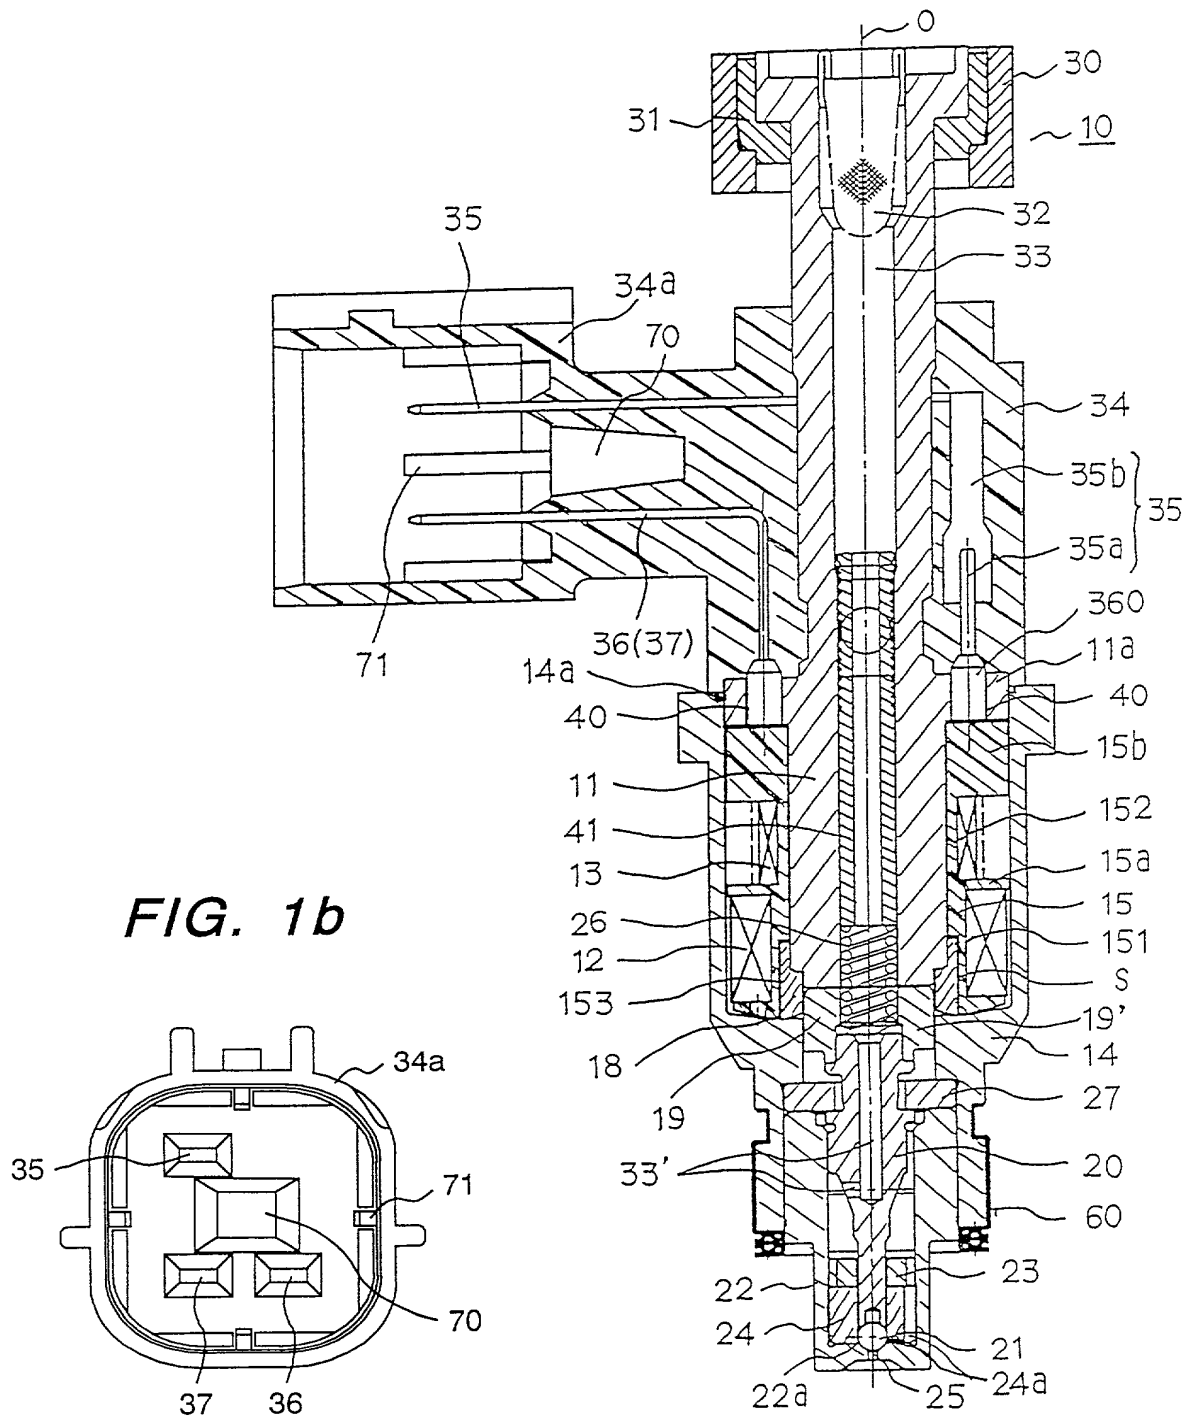

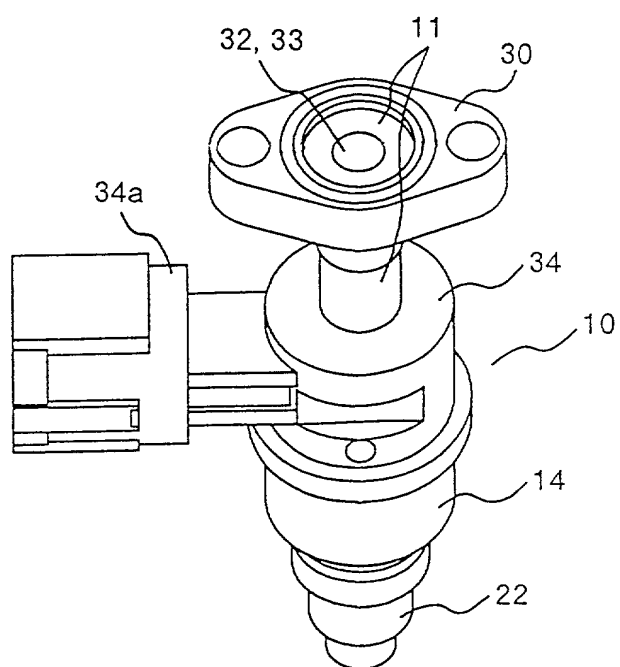
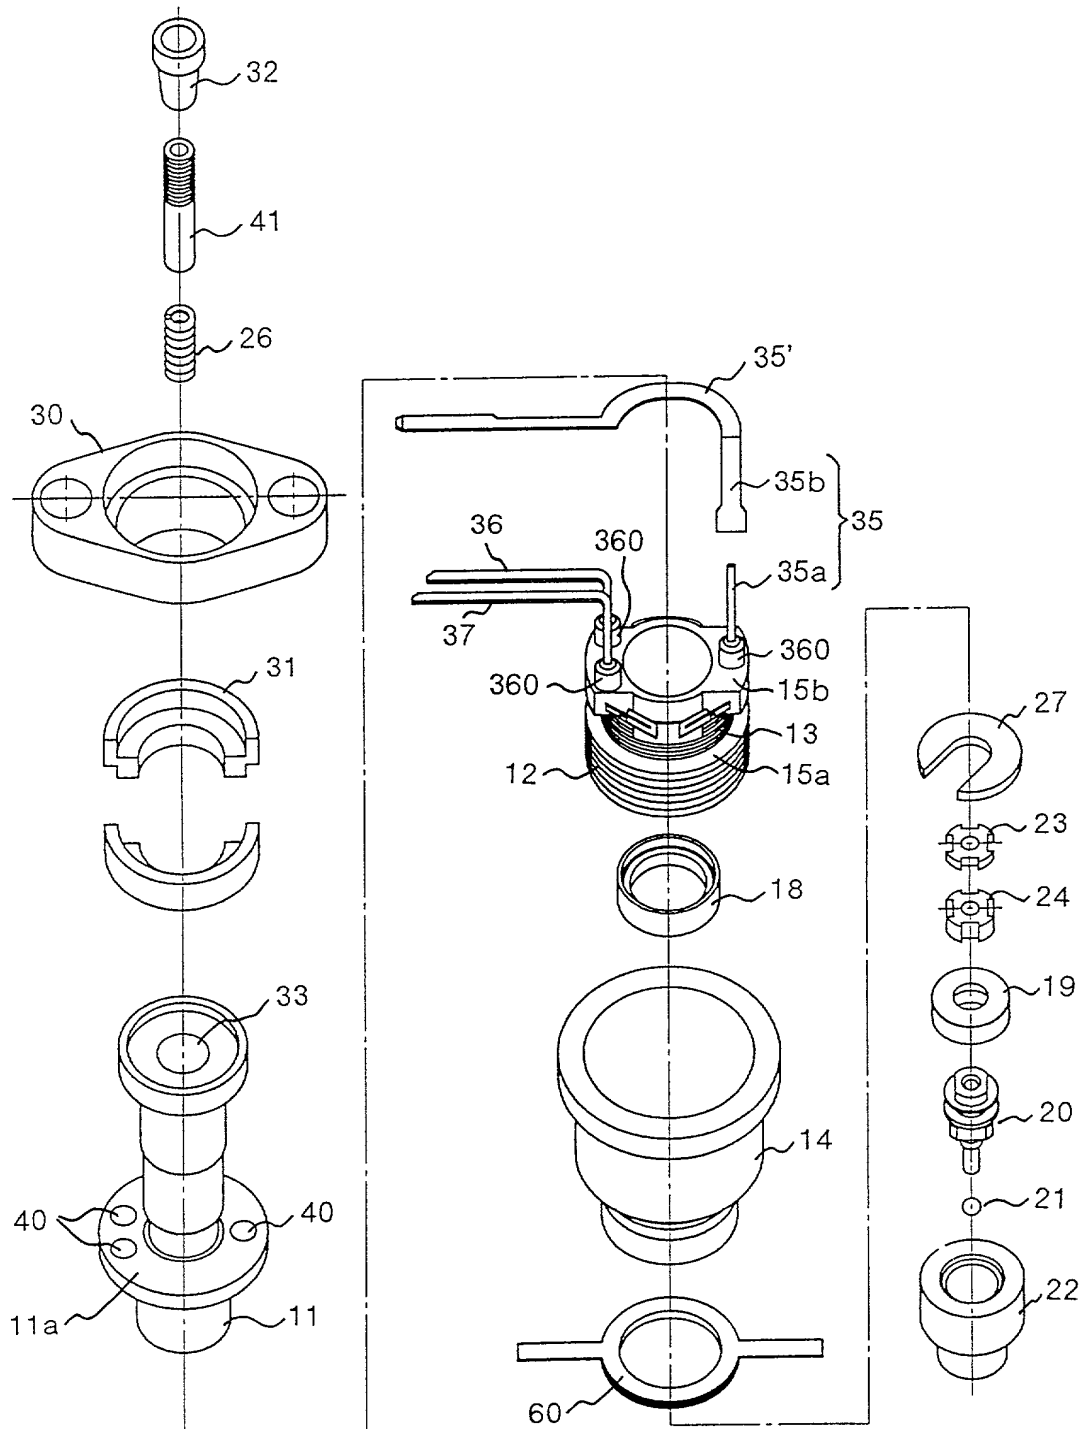
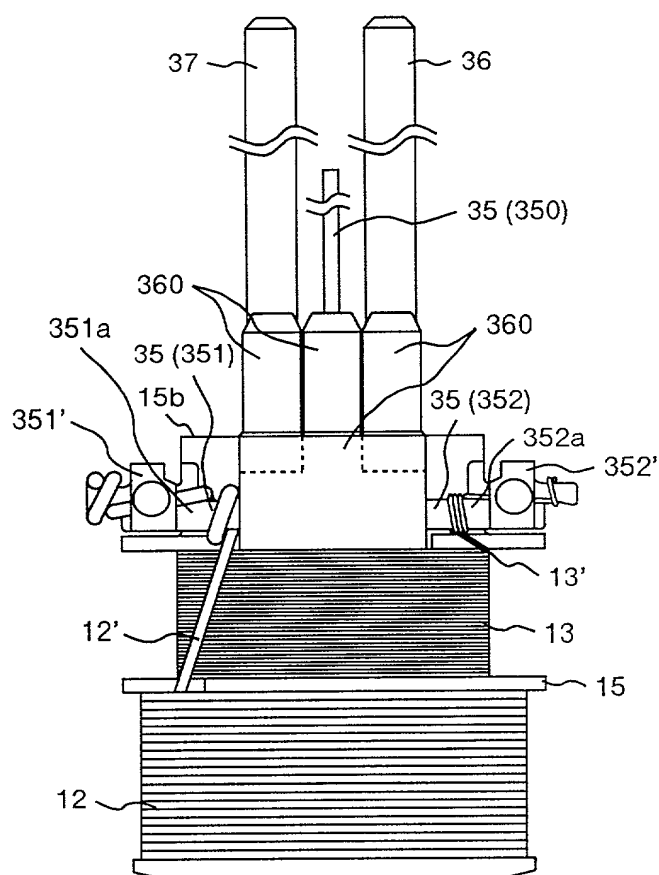
**FIG. 2**

FIG. 3








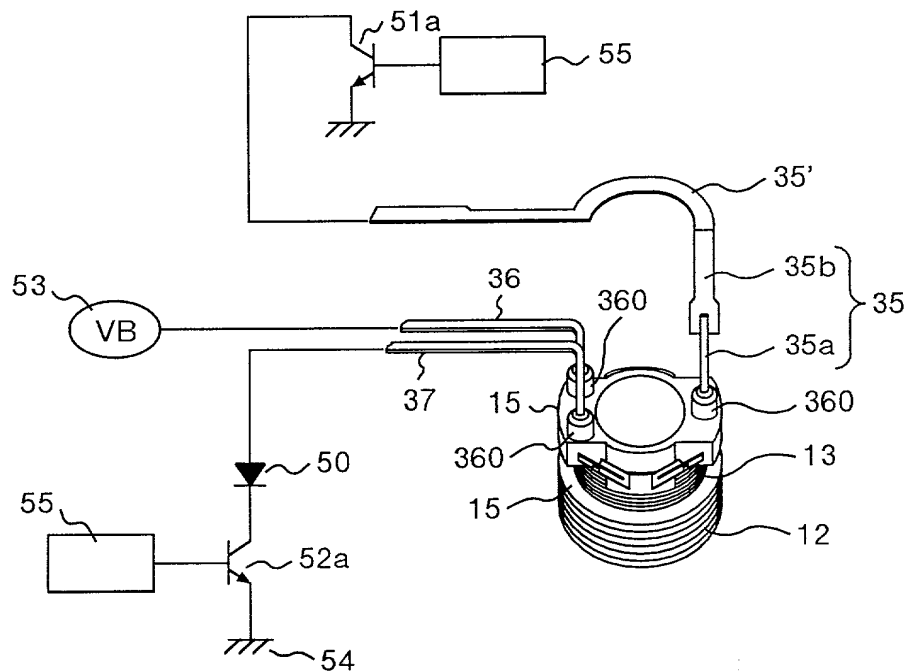


FIG. 6

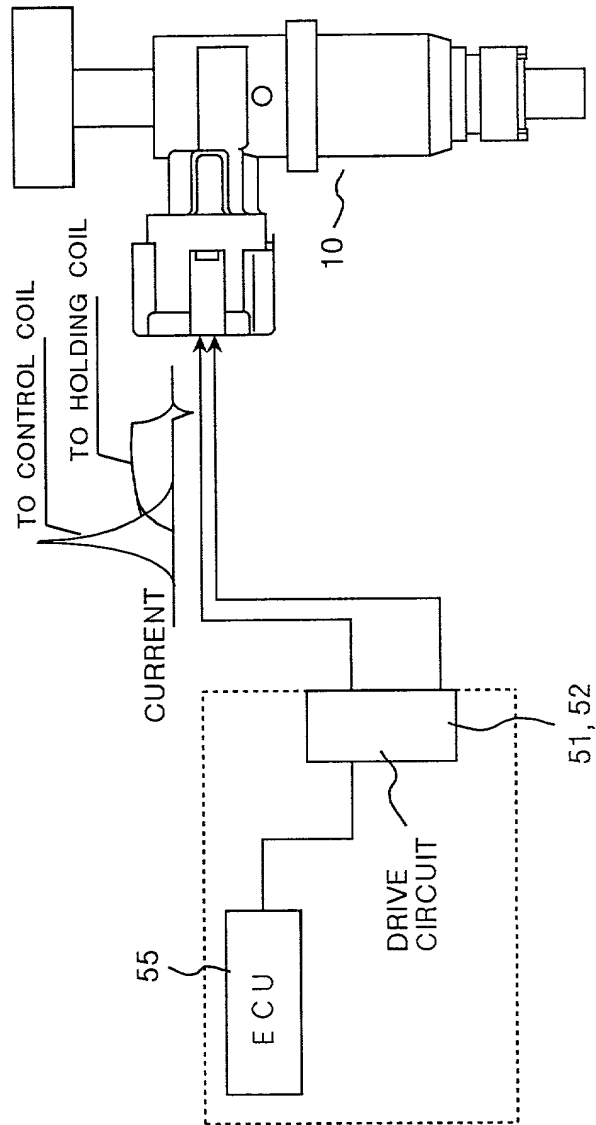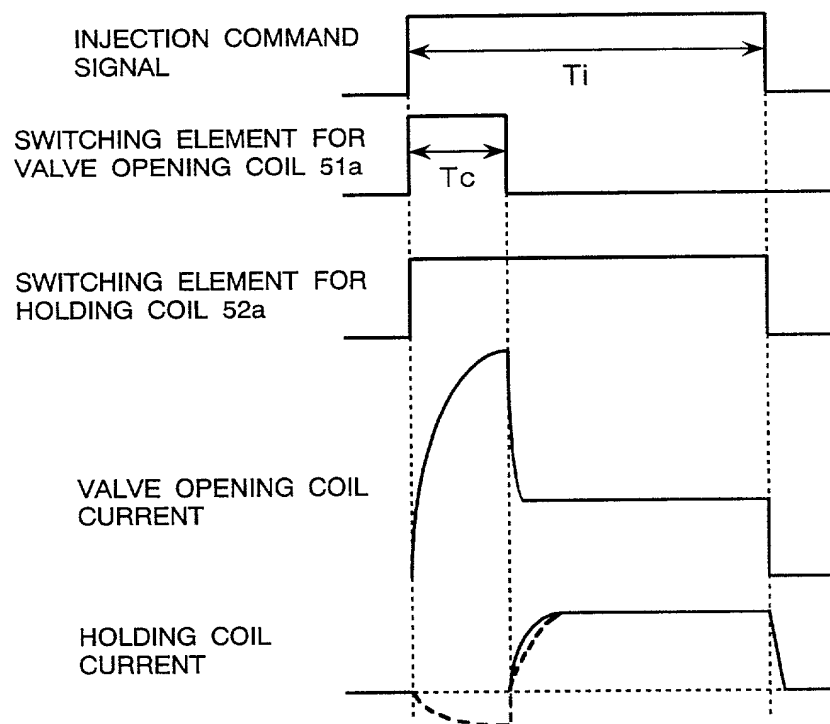

**FIG. 7**


**FIG. 8a**

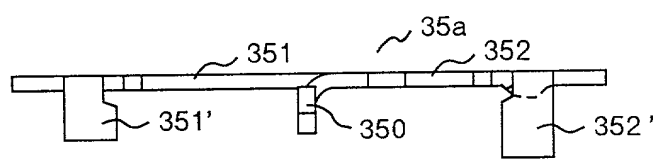

**FIG. 8c**

**FIG. 8b**

**FIG. 8d**

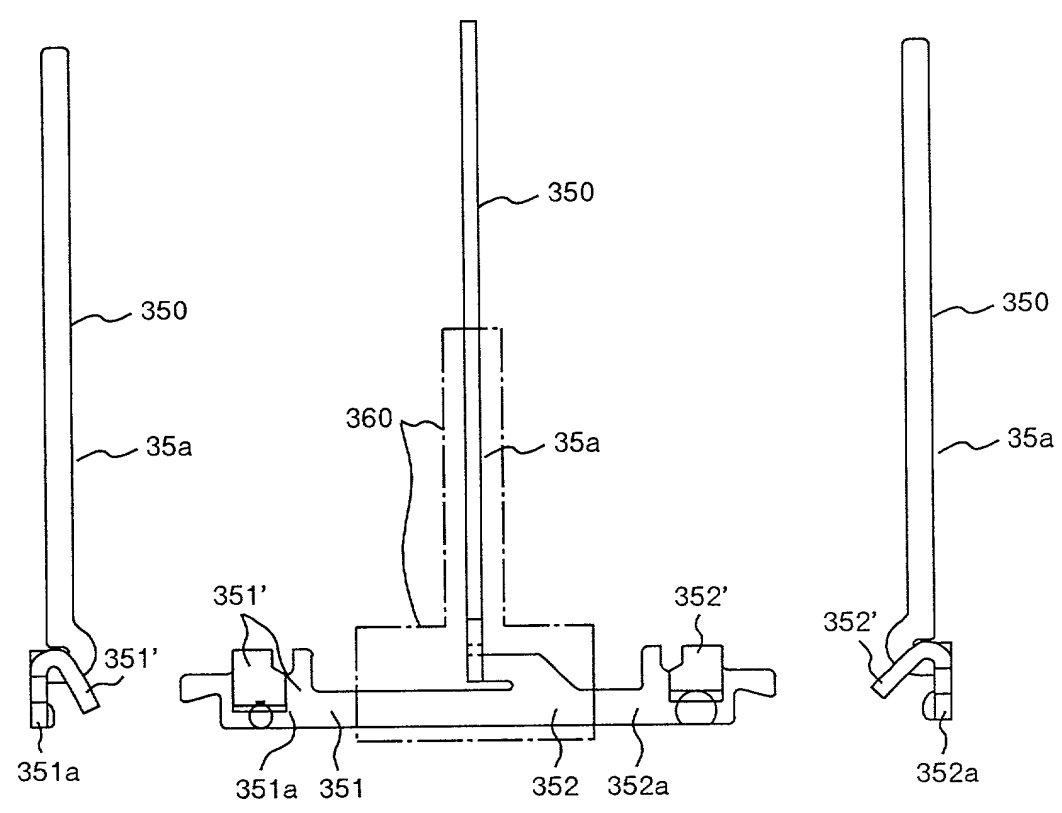

**FIG. 8e**



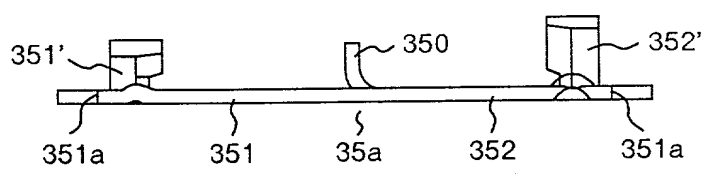




FIG. 9

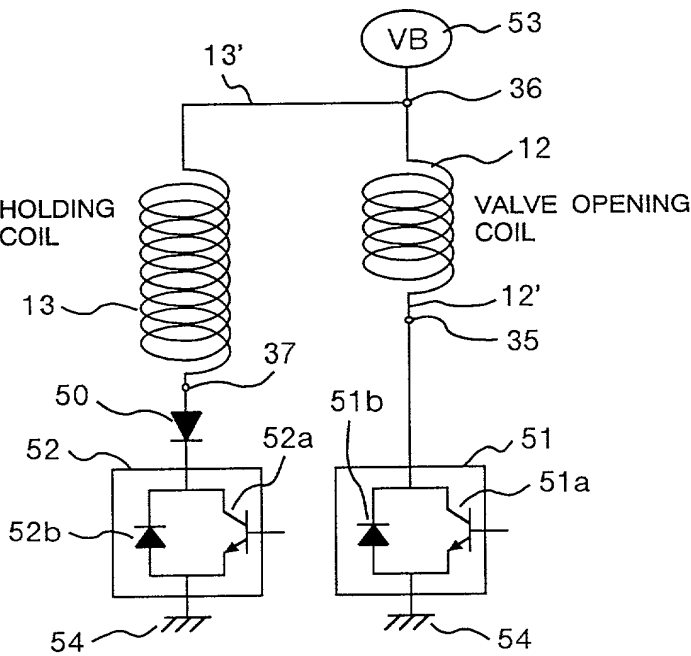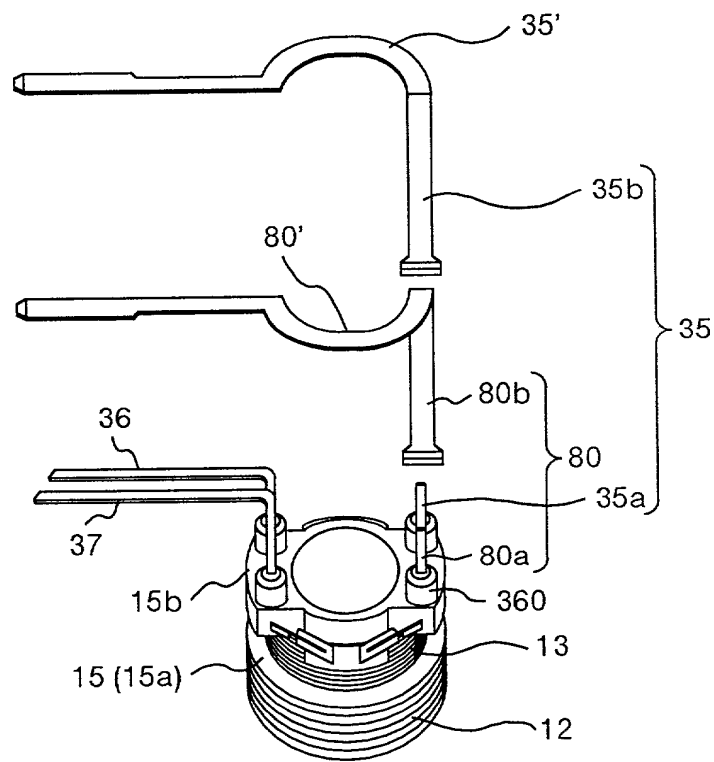

**FIG. 10**

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Electromagnetic Fuel Injector

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

The specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。

☒ was filed on March 8, 2000  
as United States Application Number or  
PCT International Application Number  
PCT/JP00/01393 and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示している。

### Prior Foreign Application(s)

外国での先行出願

(Number) (番号)	(Country) (国名)
(Number) (番号)	(Country) (国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

(Day/Month/Year Filed) (出願年月日)	<input type="checkbox"/>
(Day/Month/Year Filed) (出願年月日)	<input type="checkbox"/>

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Application No.) (出願番号)	(Filing Date) (出願日)
(Application No.) (出願番号)	(Filing Date) (出願日)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration (日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

9

Martin Fleit, Reg. No. 16,900; Herbert I. Cantor, Reg. No. 24,392; James F. McKeown, Reg. No. 25,406; Donald D. Evenson, Reg. No. 26,160; Joseph D. Evans, Reg. No. 26,269; Gary R. Edwards, Reg. No. 31,824; Jeffrey D. Sanok, Reg. No. 32,169; Richard R. Diefendorf, Reg. No. 32,390; and Paul A. Schnose, Reg. No. 39,361

## 書類送付先

Send Correspondence to:

Evenson, McKeown, Edwards & Lenehan P.L.L.C. Suite 700  
1200 G St., N.W., Washington, D.C. 20005

## 直接電話連絡先：(氏名及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Telephone: (202)628-8800

Fax: (202)628-8844

## 唯一または第一発明者

Full name of sole or first inventor

1-00

Yasunaga HAMADA

## 発明者の署名

日付

Inventor's signature

Date

Yasunaga Hamada02/09/01

## 住所

Residence

Hitachinaka, JapanJPX

## 国籍

Citizenship

Japan

## 私書箱

Post Office Address

c/o HITACHI CAR ENGINEERING CO., LTD.

2477, Takaba, Hitachinaka-shi, Ibaraki 312-0062, Japan

(第二以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for second and subsequent joint inventors.)

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

第二共同発明者		Full name of second joint inventor, if any <u>280 Yasuo NAMAIZAWA</u>	
第二共同発明者の署名	日付	Second inventor's signature <u>Yasuo Namaizawa</u>	Date <u>02/09/2001</u> <u>02/02/2001</u>
住所		Residence <u>Ishioka, Japan (TPX)</u>	
国籍		Citizenship Japan	
私書箱		Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg., 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan	
第三共同発明者		Full name of third joint inventor, if any	
第三共同発明者の署名	日付	Third inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	
第四共同発明者		Full name of fourth joint inventor, if any	
第四共同発明者の署名	日付	Fourth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	
第五共同発明者		Full name of fifth joint inventor, if any	
第五共同発明者の署名	日付	Fifth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	

(第六以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for sixth and subsequent joint inventors.)